

EtherNet/IP Gateway for EnDat encoders

- Compact and robust design
- IP 65 ingress protection

EtherNet/IP™ CE


Electrical specification

Power supply	9-36 Vdc
Polarity protected	Yes
Current consumption	Typical 120 mA at 24 Vdc. Max. 220 mA at 24 Vdc
Output interface	EtherNet/IP
Supported profile	Encoder device profile 0x22
Addressing	Assigned dynamically via BOOTP
Supported encoders	≤25 bit singleturn rotary encoders, ≤37 bit multiturn rotary encoders
Baud rate	100 Mbit/s
Supported encoder interface	EnDat 2.1 (2.2)
Encoder power supply	5Vdc ±5%
Max output current to EnDat encoder	400 mA
Max cable length to encoder	40 m
Supported functions	PRESET, Free Scaling, Code sequence, ACD, Firmware upgrade

Mechanical specification

Material housing	Aluminium
Weight	Approx. 400 g
Vibration (10-2000 Hz)	< 100 m/s ² according to IEC 60068-2-6
Protection class	IP 65 according to IEC 60529
Temperature, (operating, storage)	-40 °C .. +80 °C
LED indication	Bus, Mod, Net
Connection PROFINET	3x M12 connectors (2x 4pin female D-coded M12, 1x 4pin male A-coded M12)
Connection EnDat encoder	1x 17pin female M23 connector
Mechanical mounting	DIN-rail or screw

Dimensions

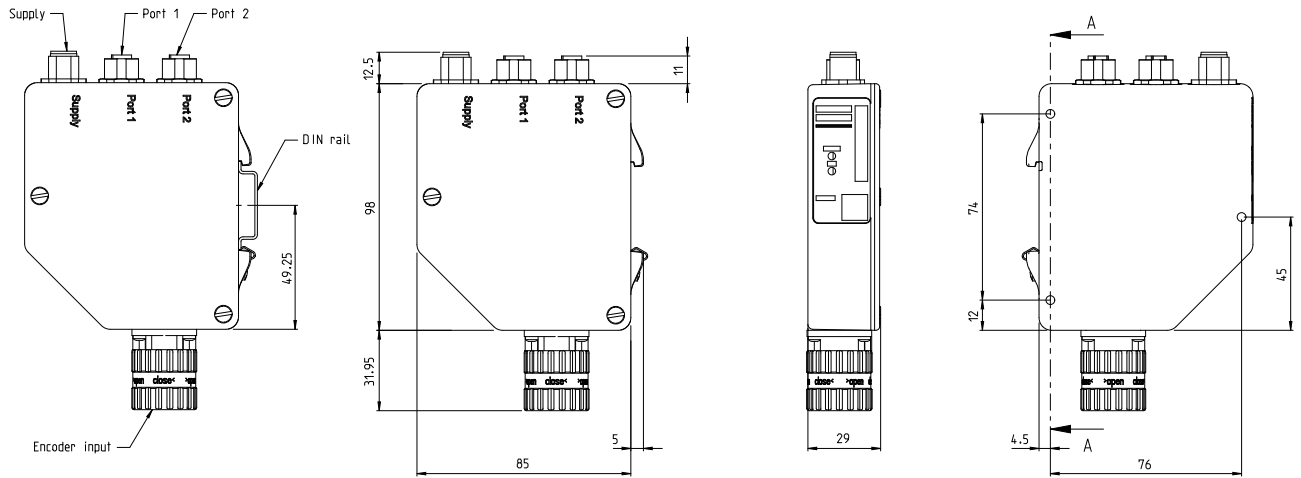

Connection EnDat encoder

Function	Pin
Sensor +EV	1
Sensor 0 V	4
+E Volt	7
0 Volt	10
Clock	8
Clock\	9
Data	14
Data\	17

Bus and supply connection

Function	Port 1	Port 2	Supply
TX+	1	1	-
RX+	2	2	-
TX-	3	3	-
RX-	4	4	-
+E V power source A			1
+E V power source B			2
0 Volt			3
0 Volt			4

Ordering information

Part number	1153130-01
-------------	------------